





APPLICATIONS

Pumping of residential wastewater from toilets, bathtubs, and washing machines; drainage of subway/tunnel, wastewater treatment of public laundry textile industries and other industries.

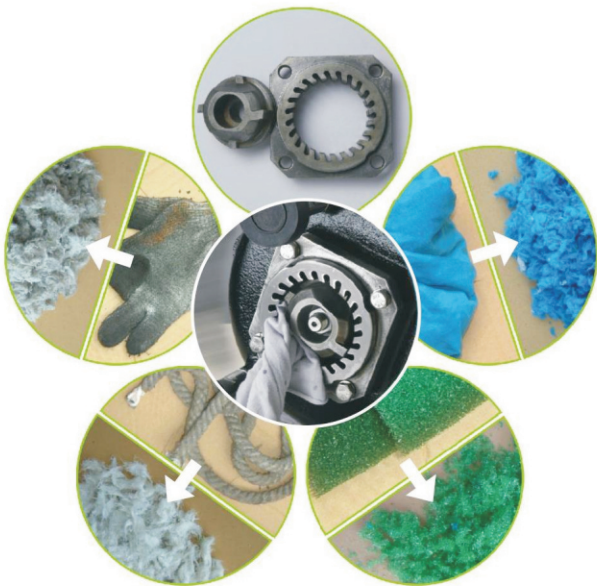

FEATURES

- 1. Grinding and shredding effects are applied to raise operating efficiency and able to handle soft solids in suspension or organic wastes in water.
- 2. Portable, non-clogging design and high wear-resistance are applied to grinding ring and shredding ring.
- 3. Dependable mechanical seal and o-ring are adopted to maintain long time operation and high precision is applied to raise stability and efficiency of motors.
- 4. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
- 5. Motor frame, shaft, screws are made of stainless steel to make long service life.

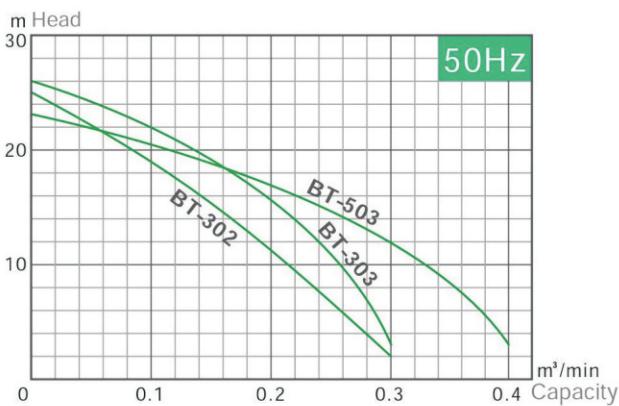

SPECIFICATIONS

2P-3000RPM

Model	Output Hp(kW)	Discharge inch	Phase φ	Standards		Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min				
BT-302	2 (1.5)	1 ¼"	1 φ / 3 φ	19	0.1	300	210	560/470	36/33
BT-303	3 (2.2)	1 ¼"	3 φ	22	0.1	300	210	520	37
BT-503	3 (2.2)	2"	3 φ	17	0.2	300	210	520	38